


MTPC-1800 DZR Brass Union with Test Point

NPT Male Threaded End x Press End - 1/2" to 2"



MATERIAL LIST	
PART	SPECIFICATION
Body	Brass - UNS C35330 (DZR)
Union Nut	Brass - UNS C35330 (DZR)
Connector	Brass - UNS C35330 (DZR)
O-ring	EPDM
Test Point	Brass - UNS C35330 (DZR)
Plug (2)	Brass - UNS C35330 (DZR)
Press End	Copper - ASTM B75 C12200
Press End O-ring	EPDM

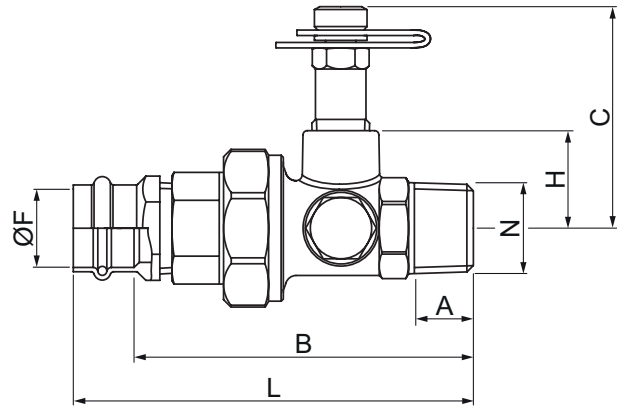

DIMENSIONS - In.								
Size	L	A	B	H	C	F	N	Weight Lbs.
1/2"	3.89	0.55	3.21	0.93	2.06	0.63	1/2" - 14 NPT	0.63
3/4"	4.29	0.55	3.42	1.02	2.17	0.88	3/4" - 14 NPT	0.83
1"	5.49	0.67	3.61	1.14	2.29	1.13	1" - 11.5 NPT	1.12
1 1/4"	5.07	0.69	4.07	1.32	2.47	1.38	1 1/4" - 11.5 NPT	1.70
1 1/2"	5.62	0.69	4.25	1.44	2.59	1.63	1 1/2" - 11.5 NPT	2.21
2"	5.81	0.71	4.31	1.67	2.82	2.134	2" - 11.5 NPT	2.99

200 PSI Non-Shock Cold Working Pressure at 250°F
Maximum Temperature 250°F at 200 PSI

Project: _____

Contractor: _____

PO/Job No.: _____

Engineer: _____


Representative: _____

Date: _____

MTPC-1800R DZR Brass Union with Test Point

NPT Male Threaded End x Press End - 1/2" to 2"

MATERIAL LIST	
PART	SPECIFICATION
Body	Brass - UNS C35330 (DZR)
Union Nut	Brass - UNS C35330 (DZR)
Connector	Brass - UNS C35330 (DZR)
O-ring	EPDM
Test Point	Brass - UNS C35330 (DZR)
Plug (2)	Brass - UNS C35330 (DZR)
Press End	Copper - ASTM B75 C12200
Press End O-ring	EPDM

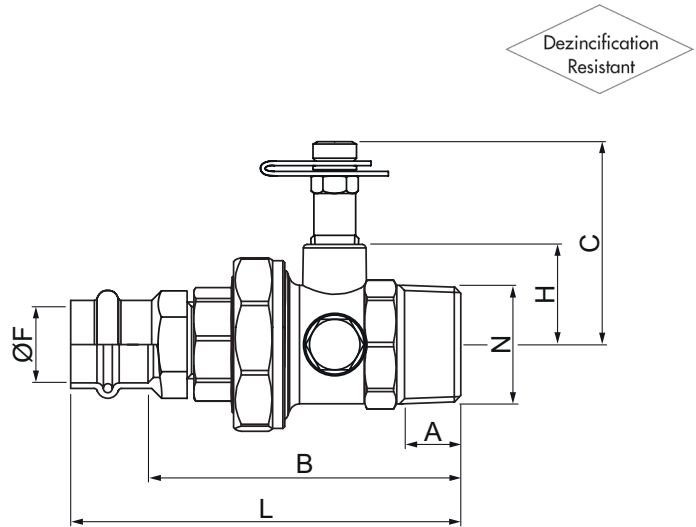

DIMENSIONS - In.								
Size	L	A	B	C	H	F	N - Thread	Weight Lbs.
3/4" x 1/2"	3.93	0.55	3.25	2.17	1.02	0.63	3/4" - 14 NPT	0.75
1" x 1/2"	4.09	0.67	3.40	2.29	1.14	0.63	1" - 11.5 NPT	0.98
1" x 3/4"	4.45	0.67	3.58	2.29	1.14	0.88	1" - 11.5 NPT	1.07
1 1/4" x 3/4"	4.57	0.69	3.69	2.47	1.32	0.88	1 1/4" - 11.5 NPT	1.63
1 1/4" x 1"	4.65	0.69	3.77	2.47	1.32	1.13	1 1/4" - 11.5 NPT	1.93
1 1/2" x 1"	4.74	0.69	3.87	2.59	1.44	1.13	1 1/2" - 11.5 NPT	1.84
1 1/2" x 1 1/4"	5.16	0.69	4.16	2.59	1.44	1.38	1 1/2" - 11.5 NPT	2.01
2" x 1 1/4"	5.26	0.71	4.26	2.82	1.67	1.38	2" - 11.5 NPT	2.68
2" x 1 1/2"	5.75	0.71	4.39	2.82	1.67	1.66	2" - 11.5 NPT	2.88

200 PSI Non-Shock Cold Working Pressure at 250°F
Maximum Temperature 250°F at 200 PSI

Project: _____

Contractor: _____

PO/Job No.: _____

Engineer: _____

Representative: _____

Date: _____